

# Design of the LhARA accelerator facility

J. Pasternak, LhARA Review, 31/03/2020

# Outline

- Introduction and motivation
- Stage 1 baseline
- Stage 1 alternative
- FFA post-accelerator
- Stage 2 injection
- Optics for Stage 2 end stations
- R&D needs
- Conclusions

# Introduction


- Laser hybrid Accelerator for Radiobiological Applications (LhARA) was proposed within the Centre for the Clinical Application of Particles (CCAP) at Imperial College London as a facility dedicated to the systematic study of radiobiology.
- It will allow study with proton beams with a flexible dose delivery (including a novel FLASH regime) at Stage 1
- It will open the study to use multiple ions (including Carbon) at Stage for both in-vitro and in-vivo end stations.
- It aims to demonstrate a novel technologies for next generation hadrontherapy.

# Initial Beam from the Laser Source


- Small emittance ( $\sim 4.1 \times 10^{-7} \pi \cdot \text{m} \cdot \text{rad}$ )
- Huge energy spread
- Very small beam size
- Very large divergence
- Neutral at the beginning then space charge dominated
- Mixture of states

Details in O. Ettliger's talk

## LASER SOURCE

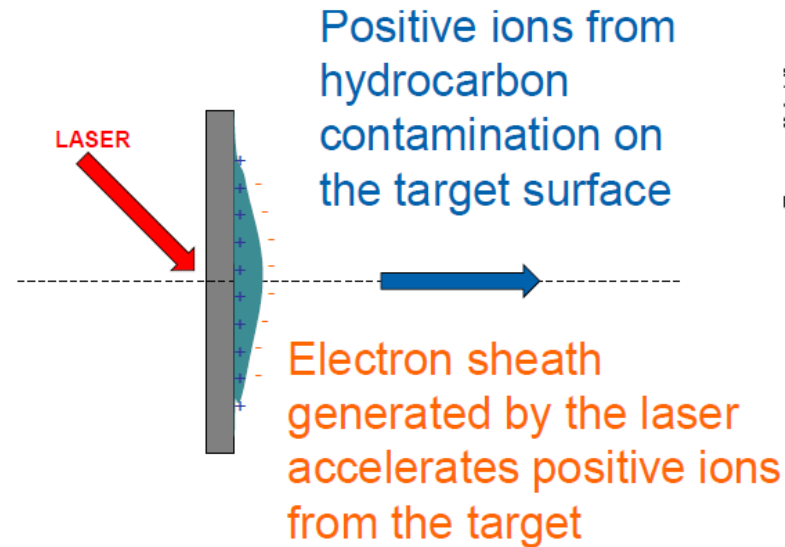


- Produces intense beams and multiple species, e.g. proton and carbon ions.

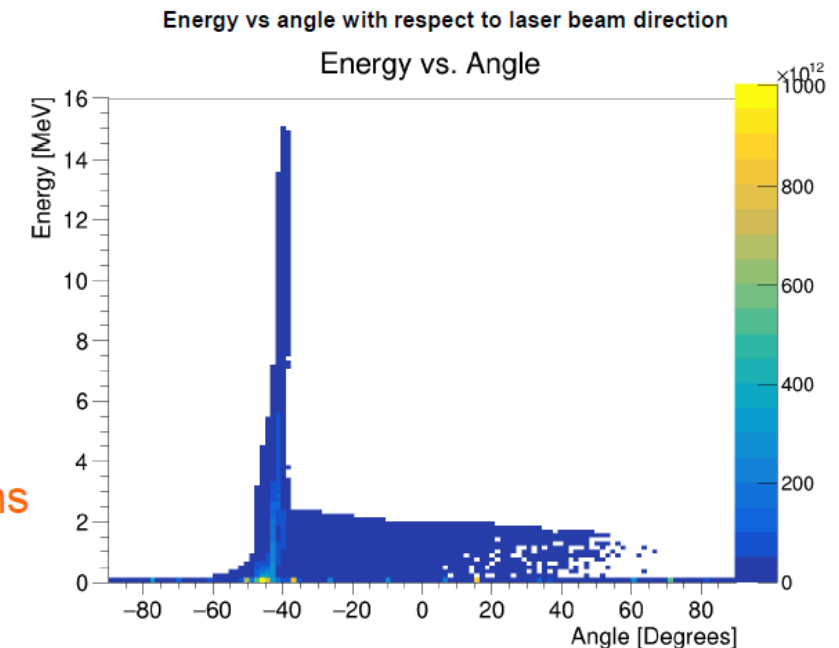

Laser driven ion beam simulation using EPOCH.


# Optics in LhARA Stage 1, baseline lattice

- Energy selection by using a collimator between GL3 and GL4
- Combined with momentum selection collimator in the arc will produce PID selection
- RF cavities to manipulate the energy spread of the accepted beam and the bunch duration

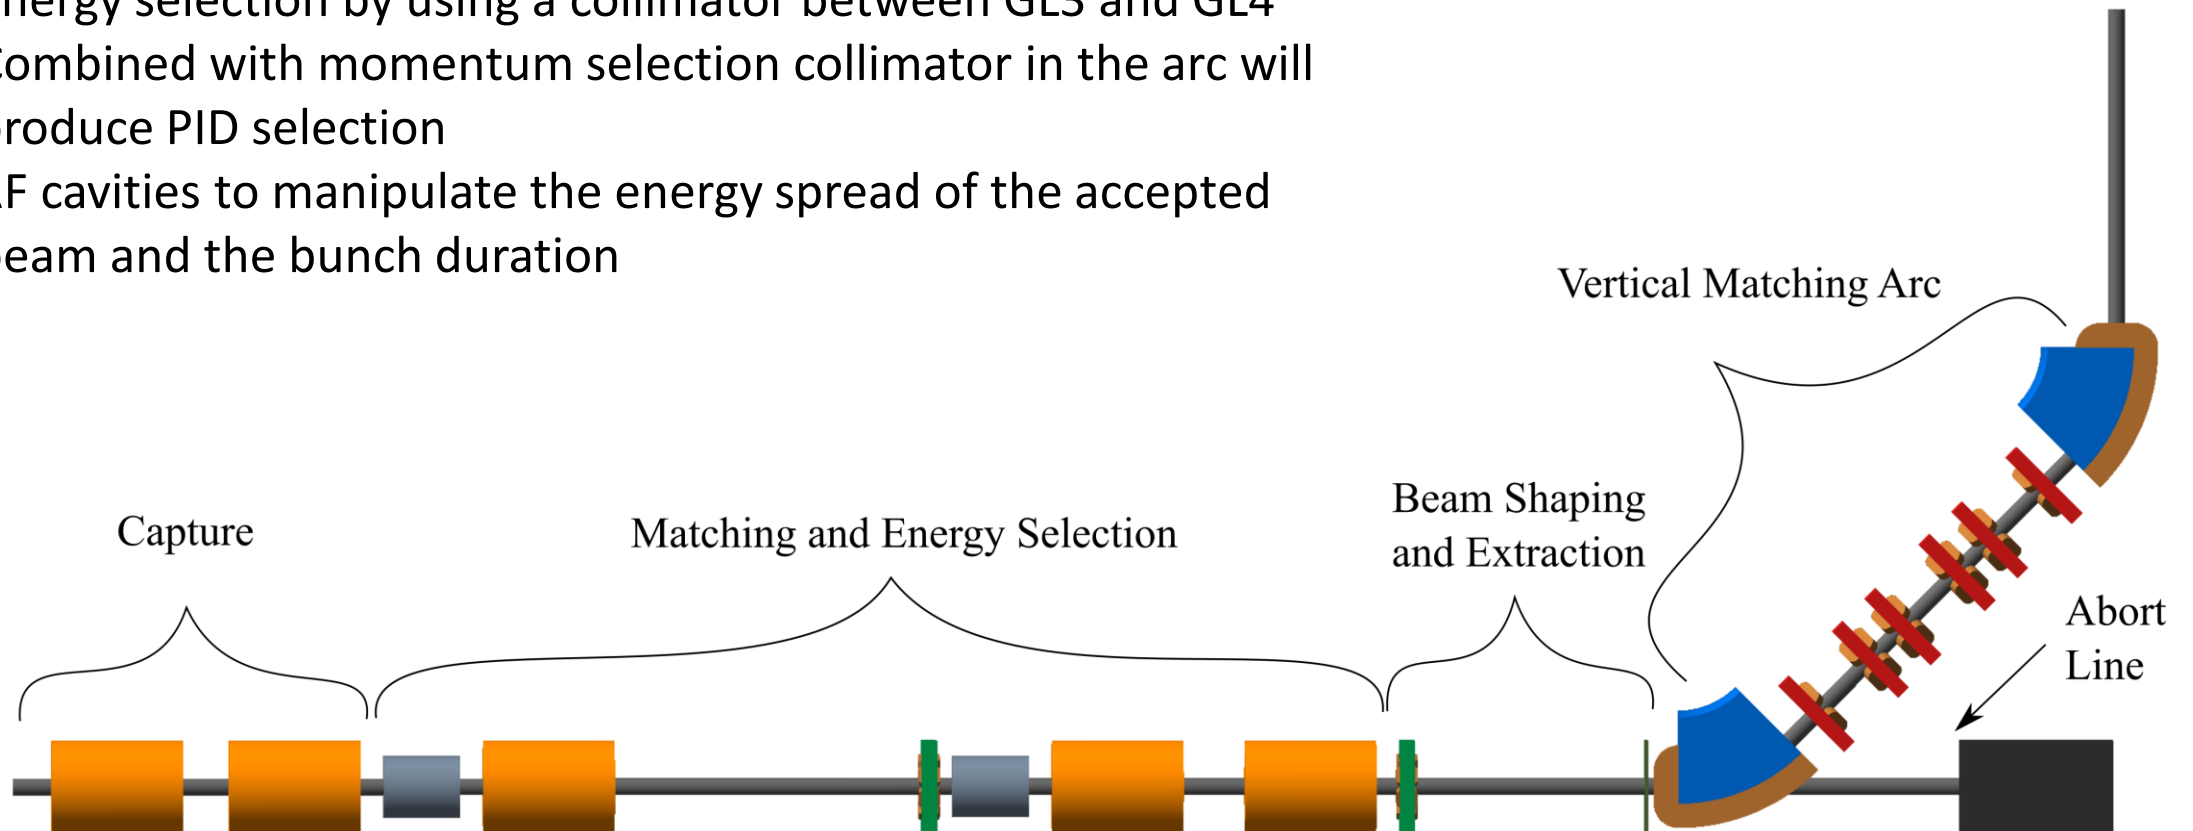


# LhARA Stage 1 parameters

- Initial beam assumed neutral first (5cm) and then space charge must be taken into account
- Strong focusing in both planes by Gabor Lenses (or solenoids) essential in the capture section, see C. Whyte's talk for details
- Matching to very small spot size unavoidable and used for the energy selection
- Matching with two lenses to the optically transparent, achromatic arc
- Redistribution of phase space using octupoles to create an uniform beam

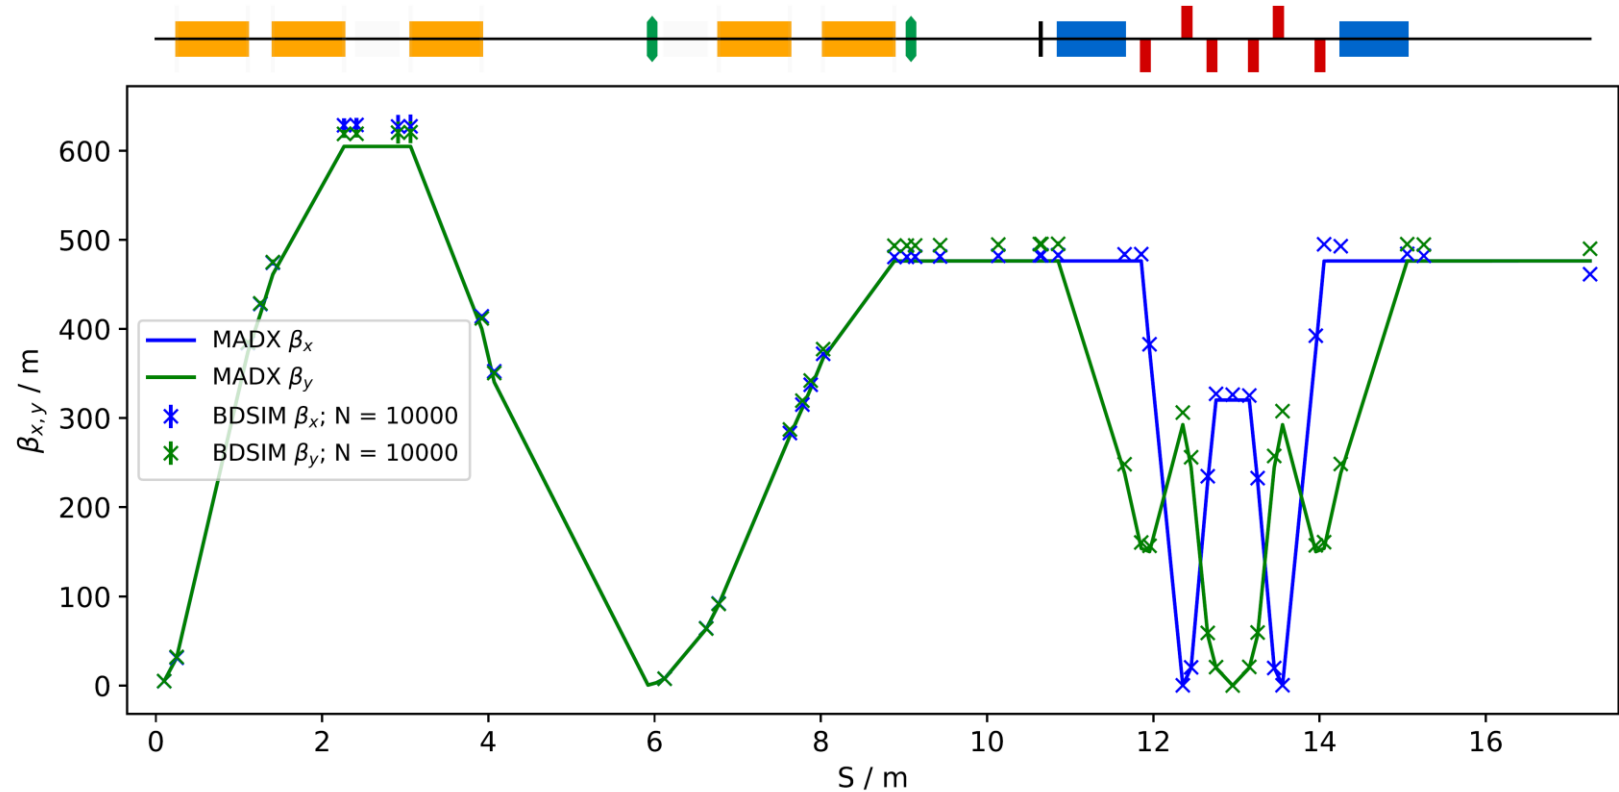


# Lhara Stage 1, alternative design

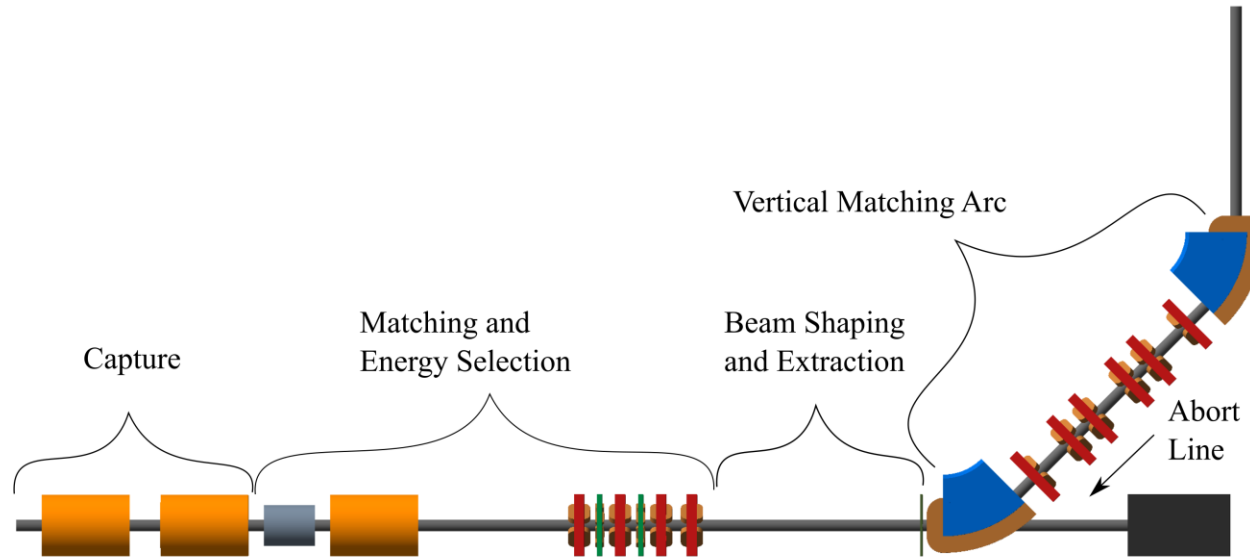

- Alternative design uses quadrupoles to avoid focusing to the spot in both planes simultaneously (a space charge mitigation)
- Octupoles would be in the right optical locations
- Optics optimisation with the space charge to be done and the performance to be demonstrated


More results on Stage 1 performance, see W. Shields' talk

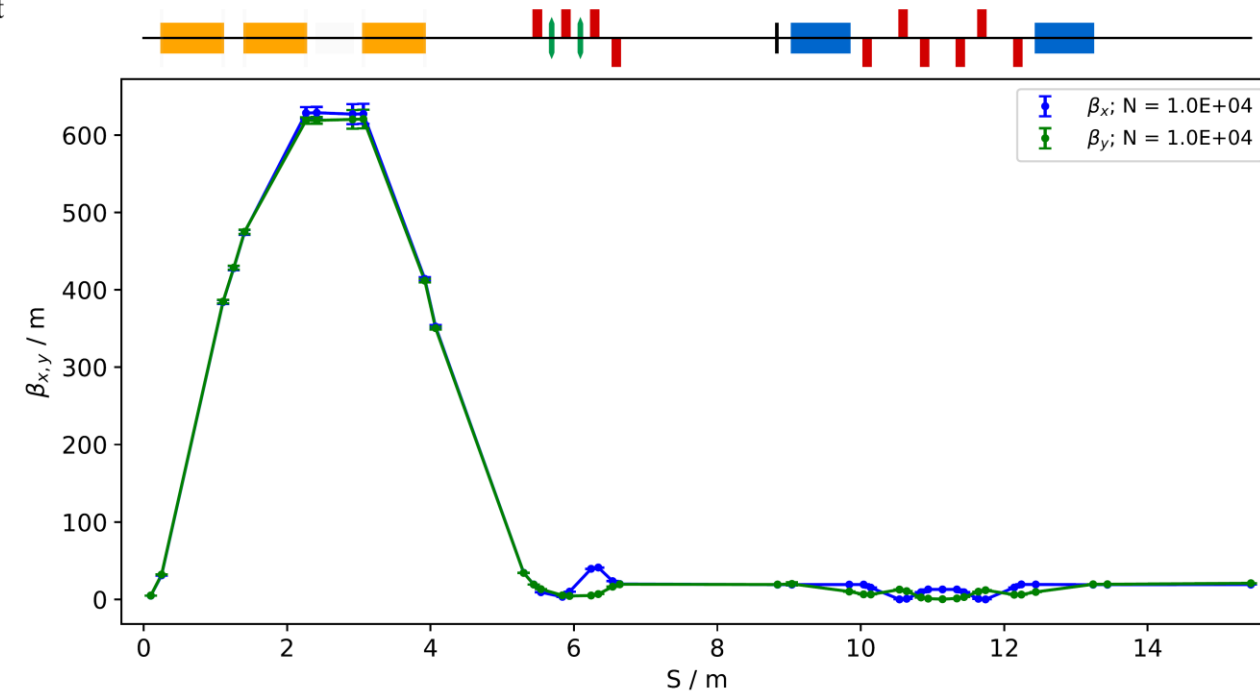

# Motivations for a Medical/Radiobiological FFA (Fixed Field Accelerator)

## Advantages of FFA for medical/radiobiological applications:

- High/variable dose delivery (high rep rate – 10-100 Hz)
- Variable energy operation without energy degraders
- Compact size and low cost
- Simple and efficient extraction
- Stable and easy operation
- Multiple extraction ports
- Bunch to Pixel active scanning possible.
- Multiple ion capability

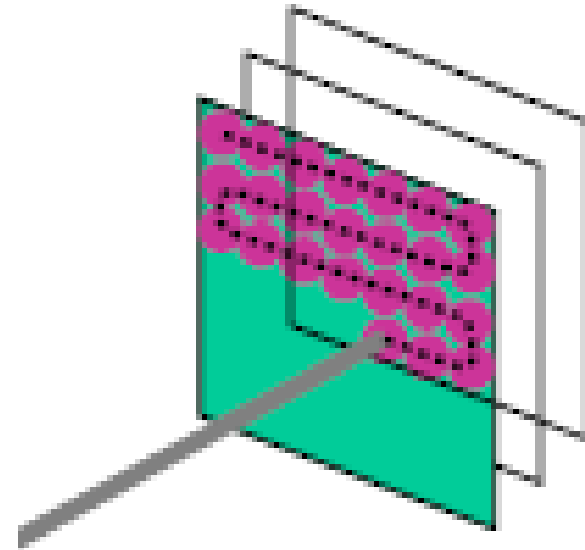




# Energy Variability using Laser Accelerated Ions

Variable extraction energy from  
FFA within 1 s (20-125 MeV)  
at fixed geometry

+

pulse by pulse  
variation with kicker  
could be implemented


Variable input energy from  
the Laser Source  
(multiple ions are possible)

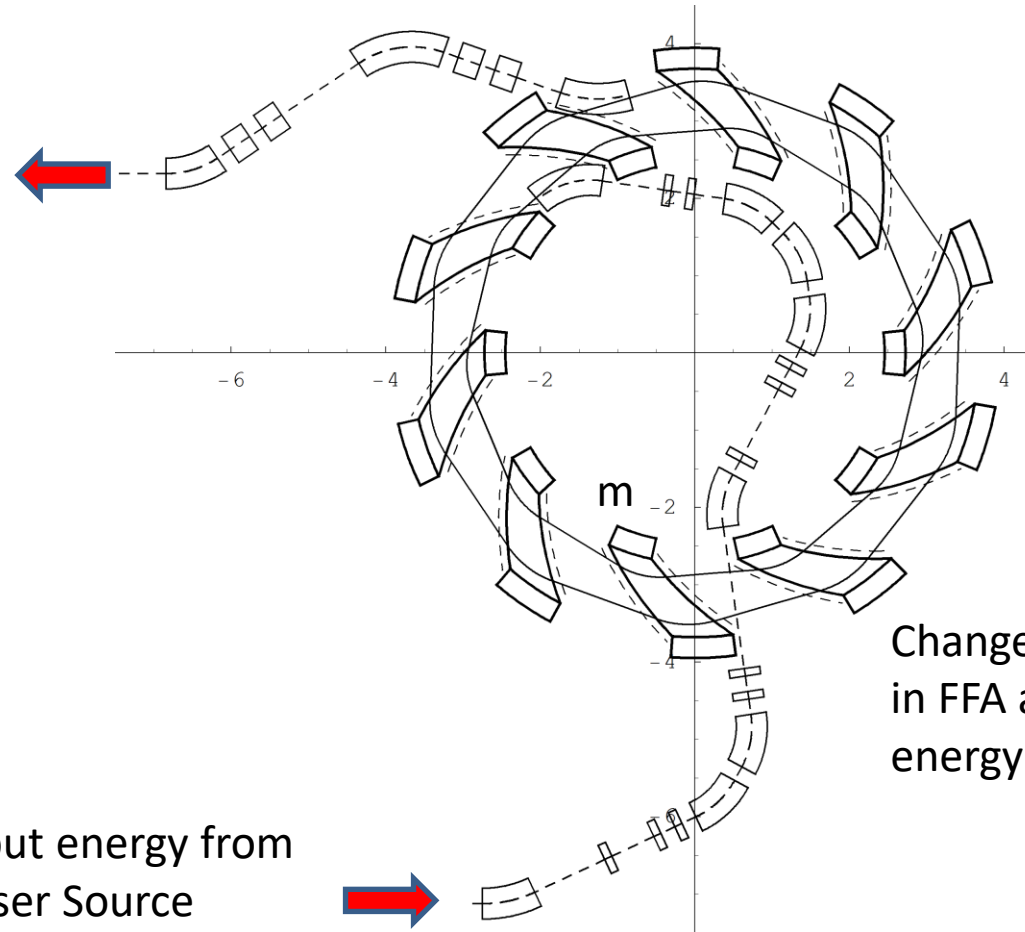

Change of the value of magnetic field  
in FFA and transfer lines for a specific  
energy operation (laminated magnets)




# Energy for LhARA Step 2

- FFA accelerator can typically accelerate by a factor of 3 in momentum (or more). This allows to easily achieve 127.4 MeV (starting from 15 MeV).
  - Acceleration by a factor of 4 would be possible. This corresponds to 217 MeV protons.
- This would correspond to 33.4 (58.7) MeV/u for C6+.

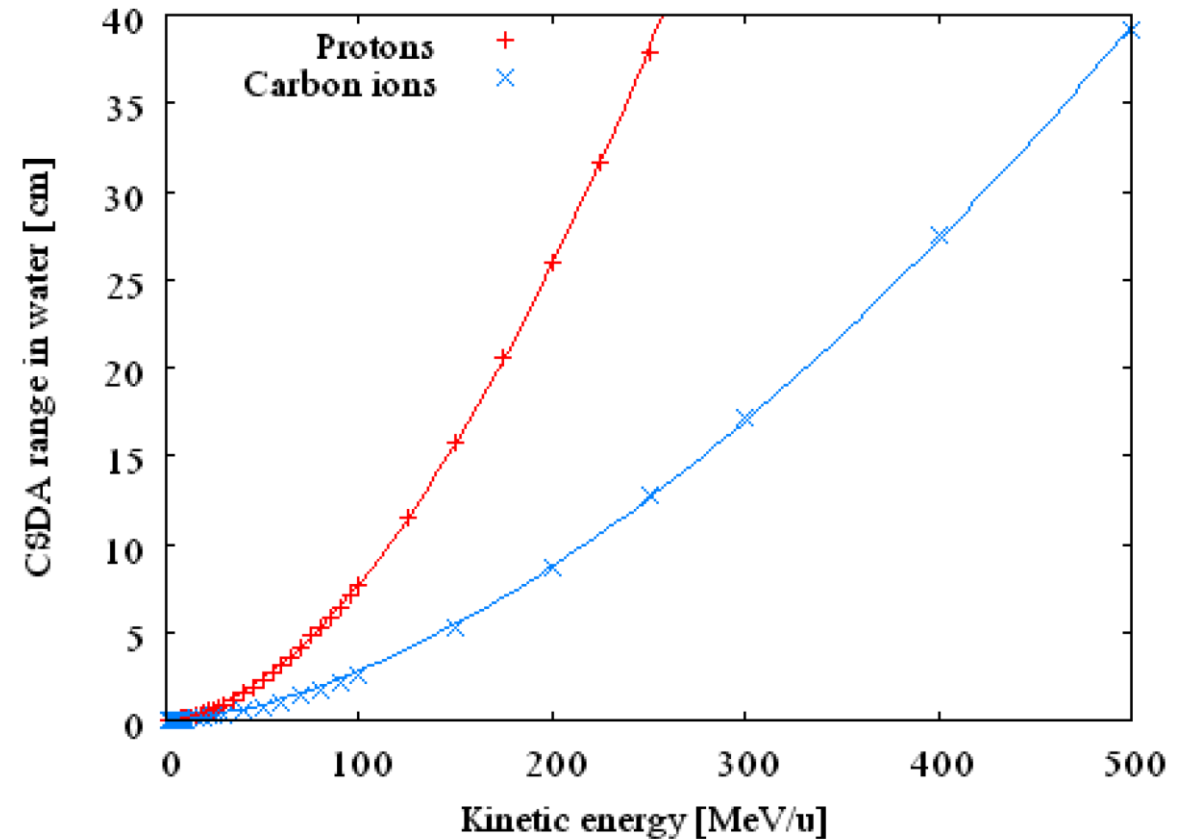




# LhARA Ring Parameters

- $N$  10
- $k$  5.33
- Spiral angle  $48.7^\circ$
- $R_{\max}$  3.48 m
- $R_{\min}$  2.92 m
- $(Q_x, Q_y)$  (2.83, 1.22)
- $B_{\max}$  1.4 T
- $p_f$  0.34
- Max Proton injection energy 15 MeV
- Max Proton extraction energy 127.4 MeV
- $h$  1
- RF frequency  
for proton acceleration (15-127.4MeV) 2.89 – 6.48 MHz
- Bunch intensity  $\text{few} \times 10^8$  protons
- Range of other extraction energies possible
- Other ions also possible

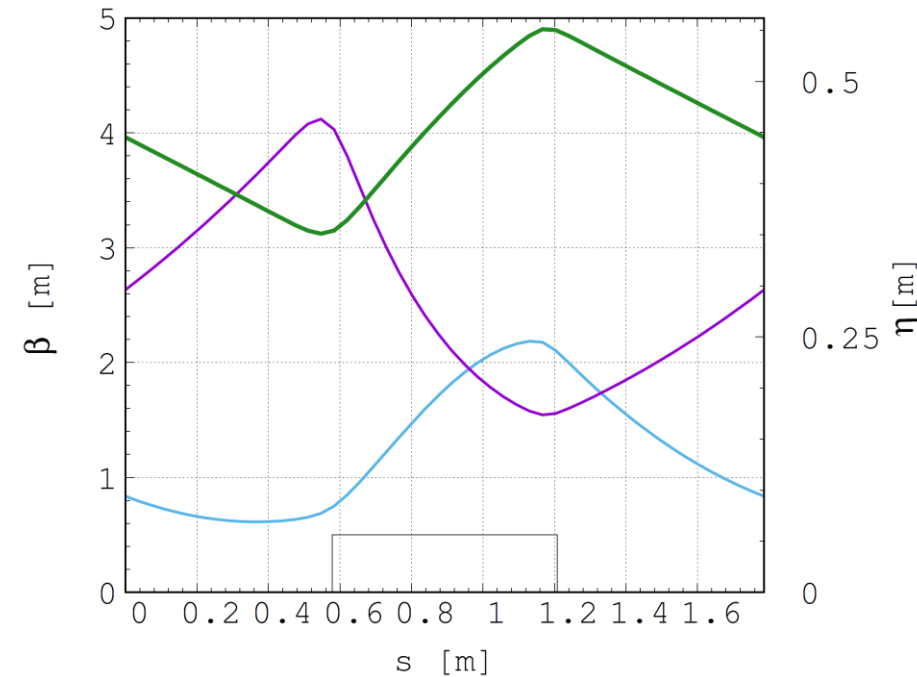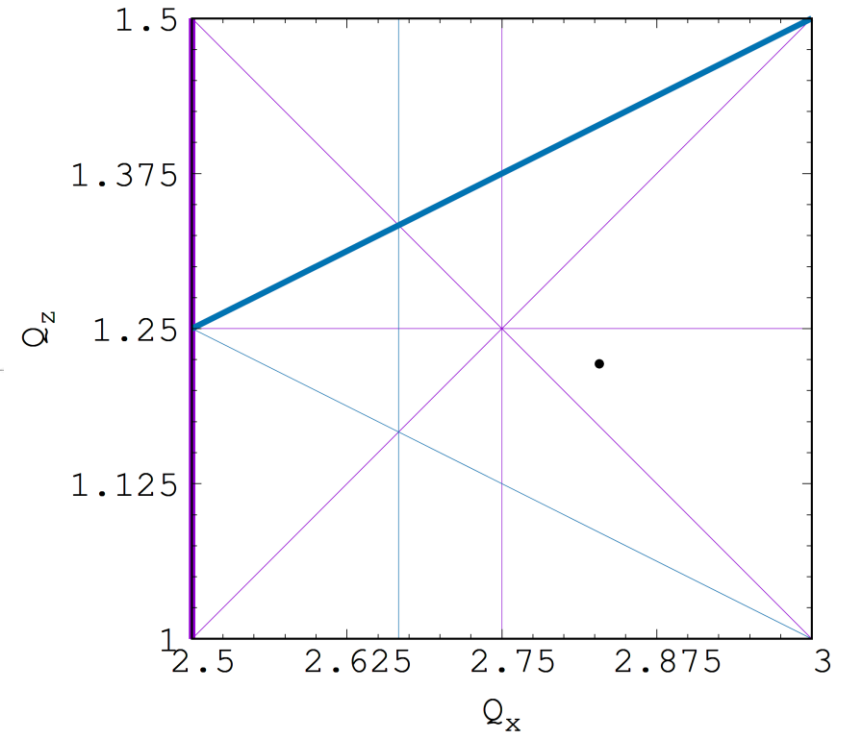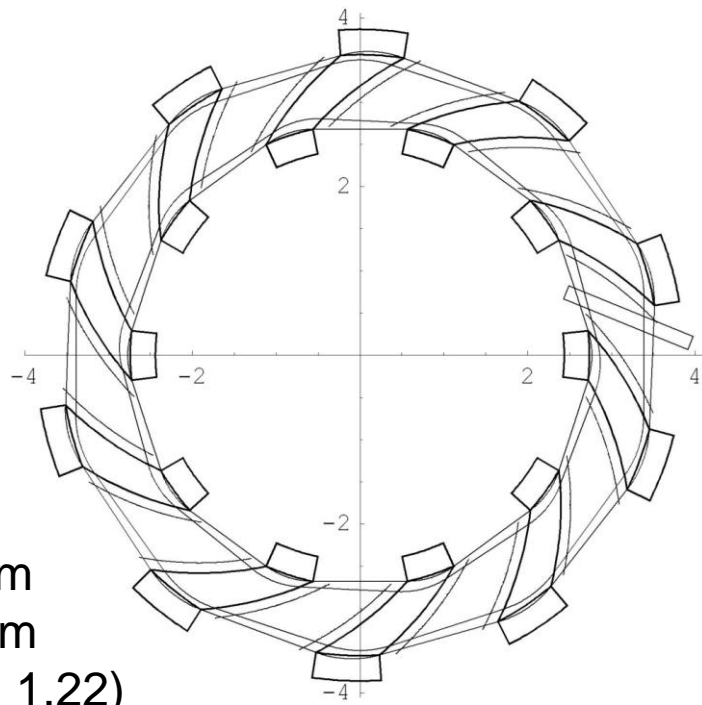


# LhARA Ring Tracking

- Performed using proven stepwise tracking code
- It takes into account fringe fields and non-linear field components
- Results show dynamical acceptances are much larger than physical ones.
- No space charge effects included yet.

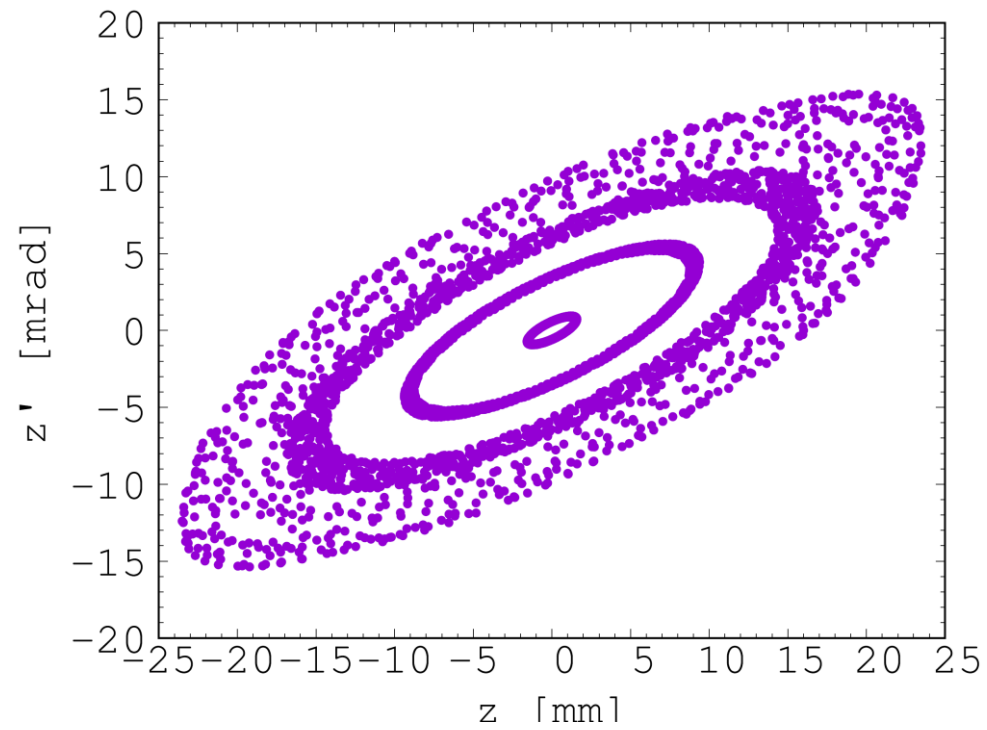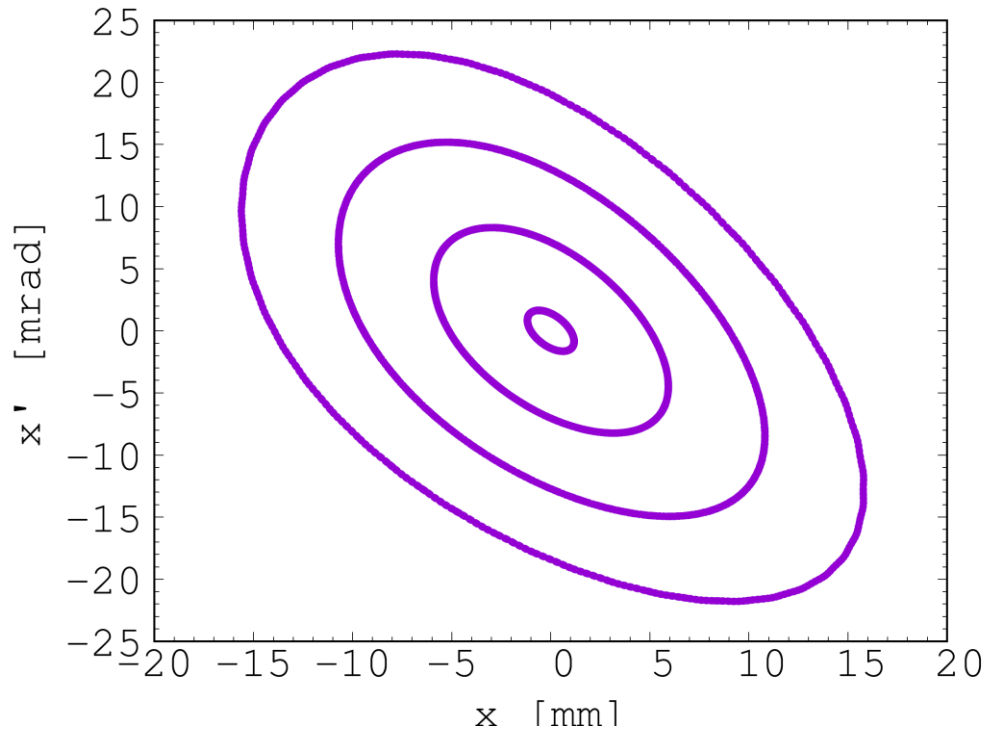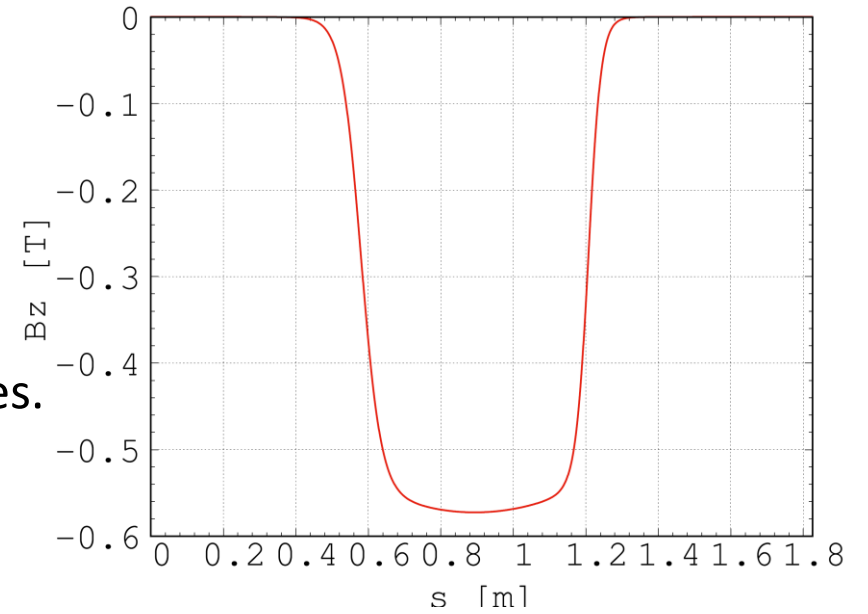


# FFA Ring with subsystems


Parameter	unit	value
Injection septum:		
nominal magnetic field	T	0.53
magnetic length	m	0.9
deflection angle	degrees	48.7
thickness	cm	1
full gap	cm	3
pulsing rate	Hz	10
Extraction septum:		
nominal magnetic field	T	1.12
magnetic length	m	0.9
deflection angle	degrees	34.38
thickness	cm	1
full gap	cm	2
pulsing rate	Hz	10
Injection kicker:		
magnetic length	m	0.42
magnetic field at the flat top	T	0.05
deflection angle	mrاد	37.4
fall time	ns	320
flat top duration	ns	25
full gap	cm	3
Extraction kicker:		
magnetic length	m	0.65
magnetic field at the flat top	T	0.05
deflection angle	mrاد	19.3
rise time	ns	110
flat top duration	ns	40
full gap	cm	2

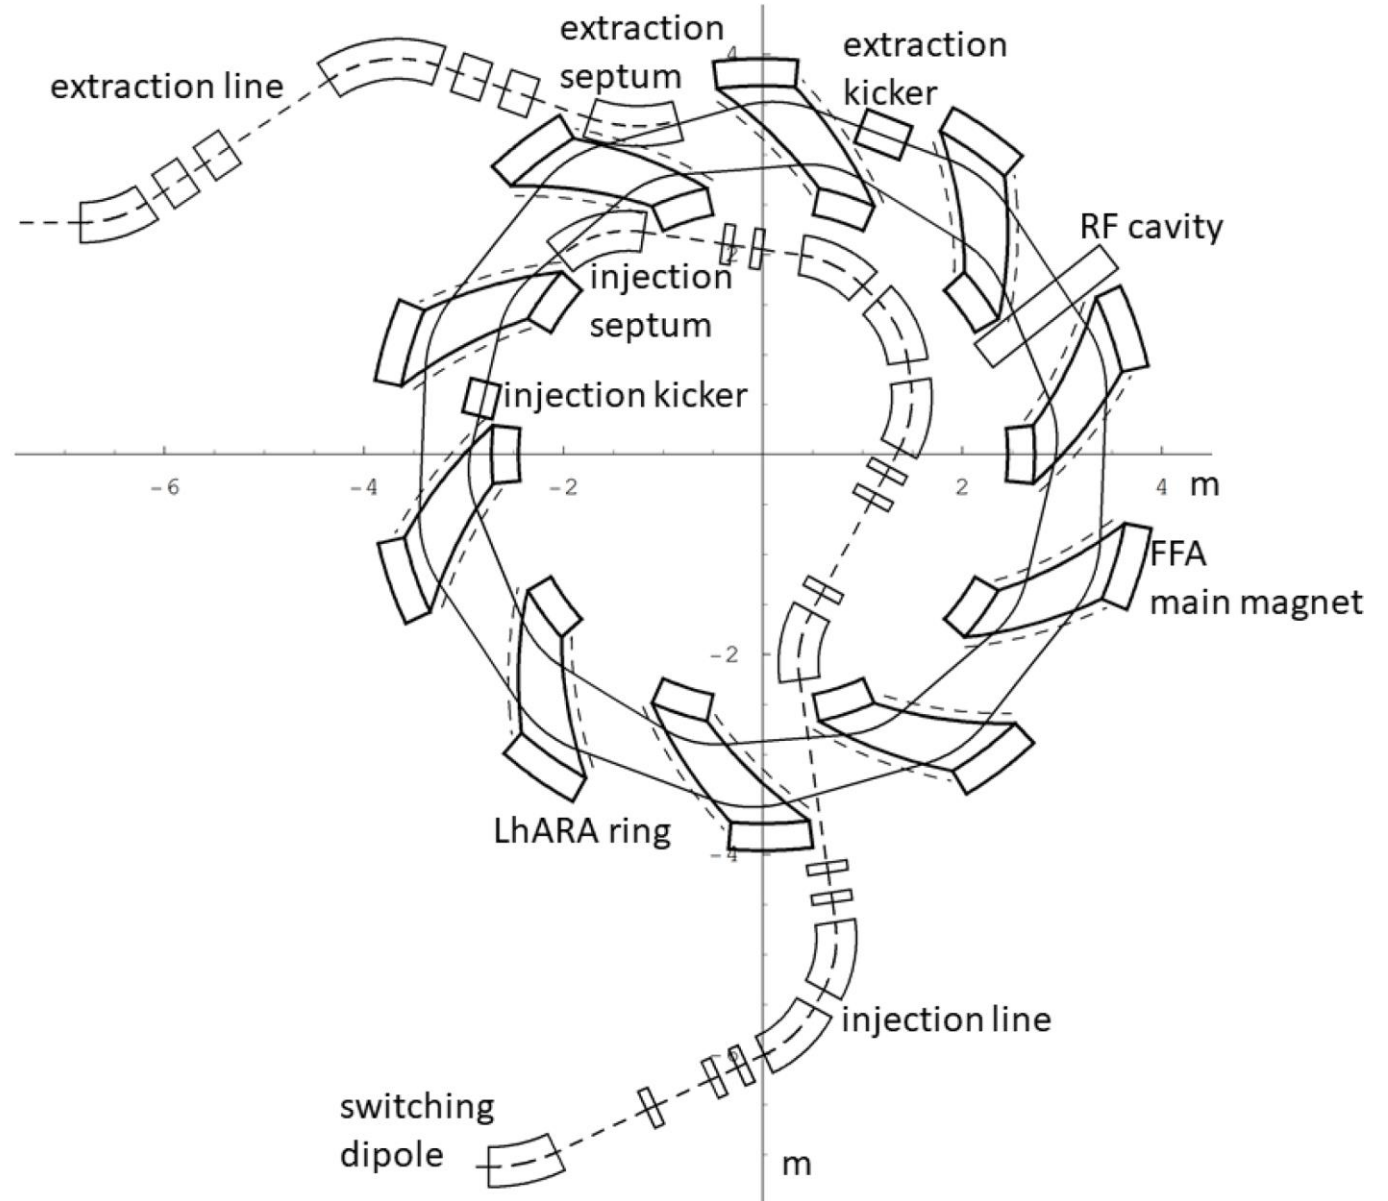

# Injection optics

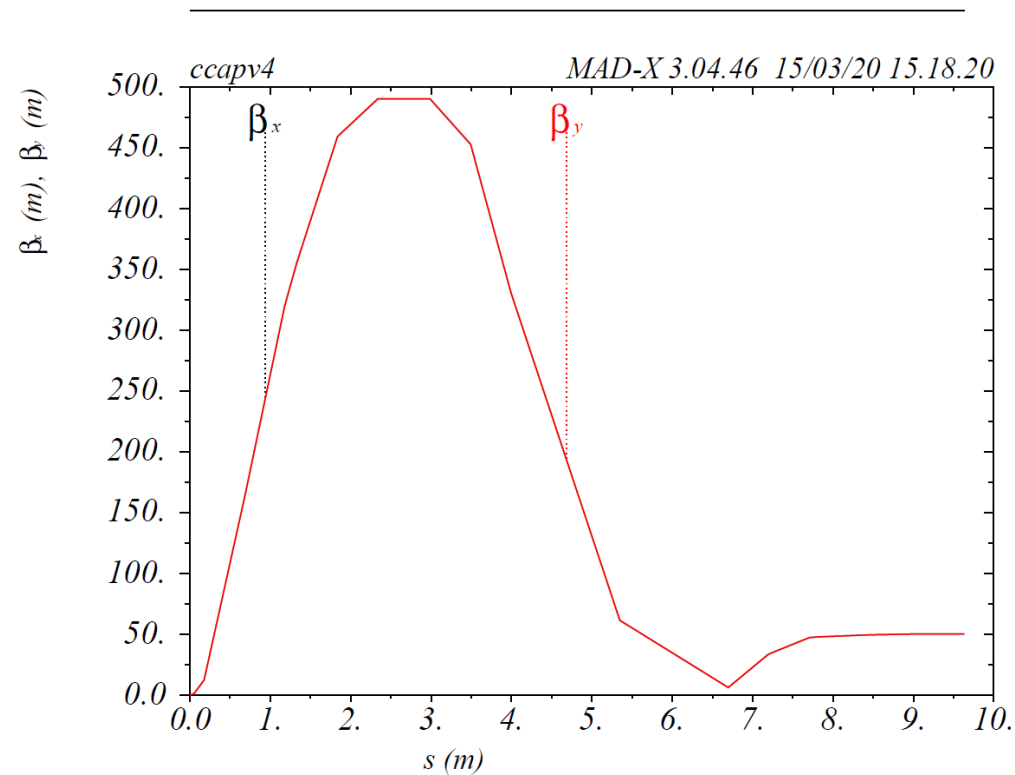


- Stage 1 can be tuned to match the injection line
- Focus point changes location and requires a dedicated collimation system
- Focusing can be realised with normal conducting solenoids

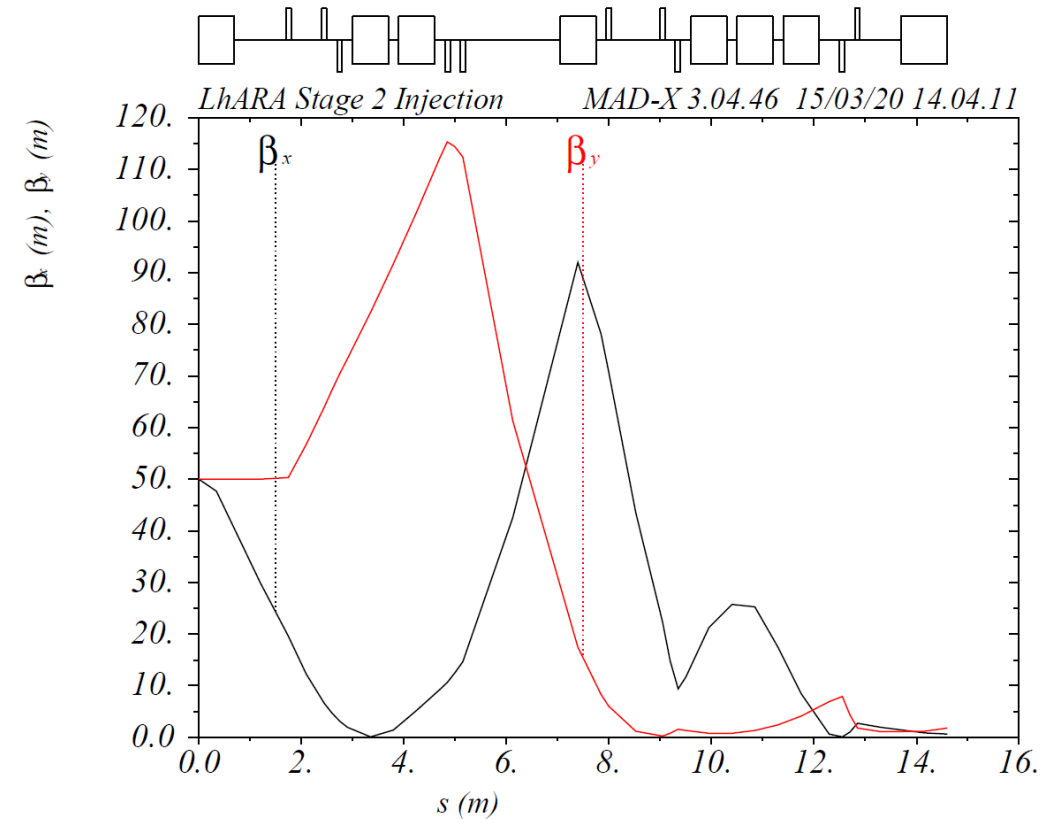


Optics from the switching dipole to the injection septum has been designed

# Extraction optics

For tracking results, see W. Shields' talk

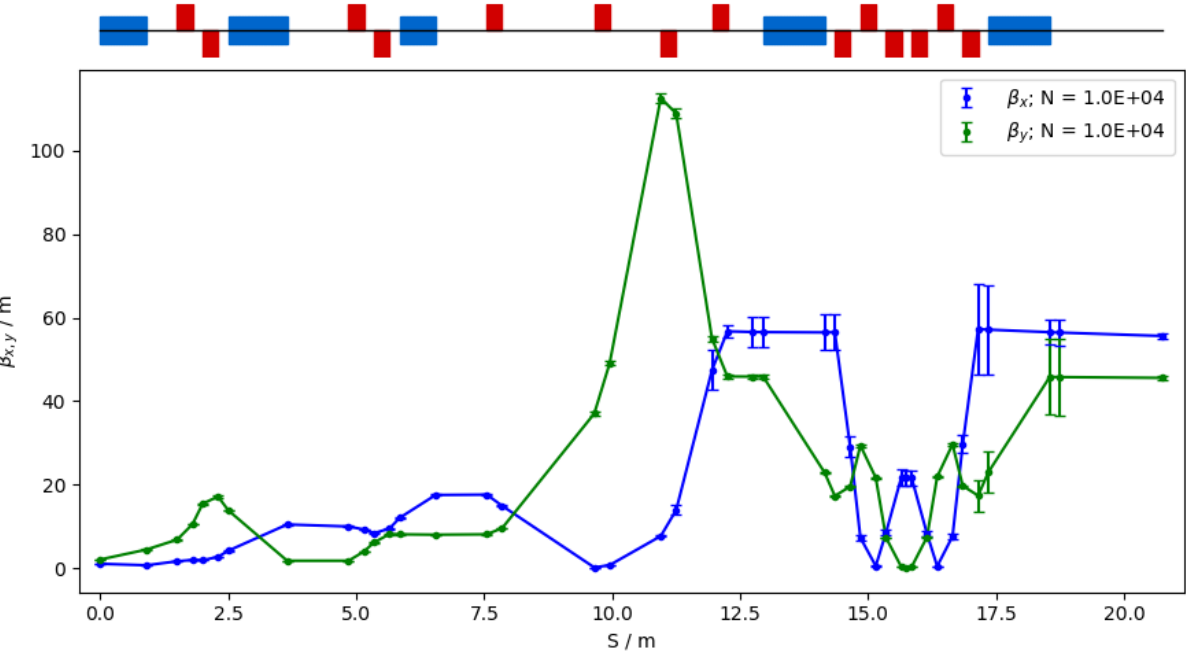


Optics for Stage 2 in-vitro end station, the arc optics scaled from the Stage 1

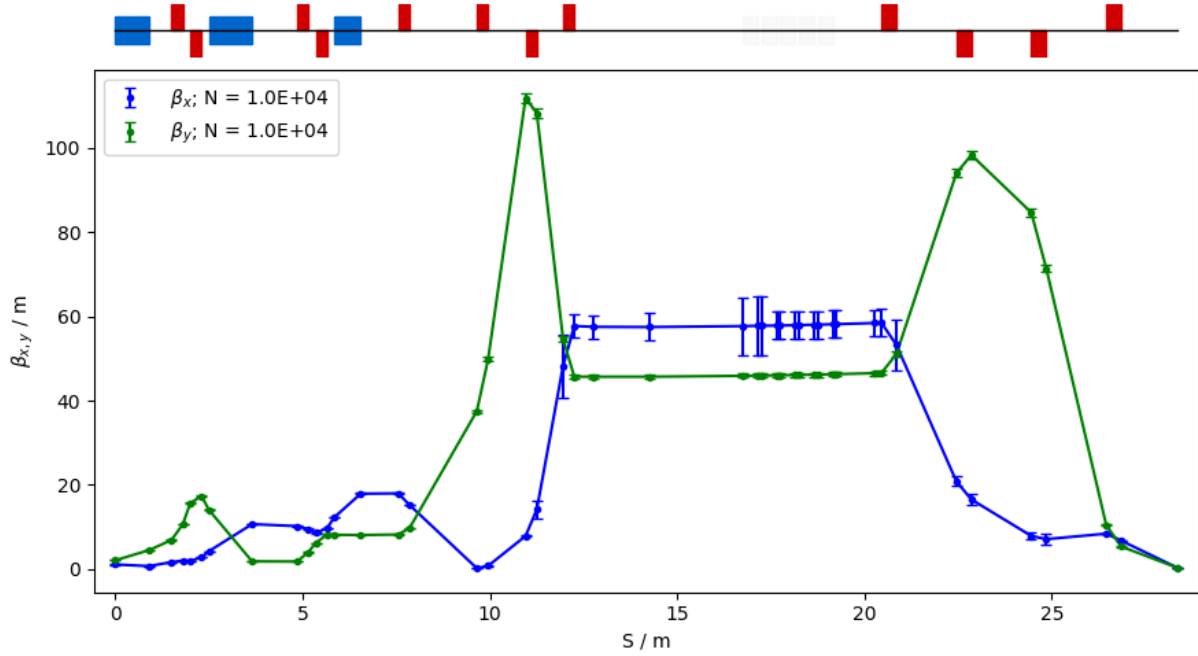

Optics for Stage 2 in-vivo end station, a dedicated final focus has been designed

# Essential R&D

## Magnet types to be considered

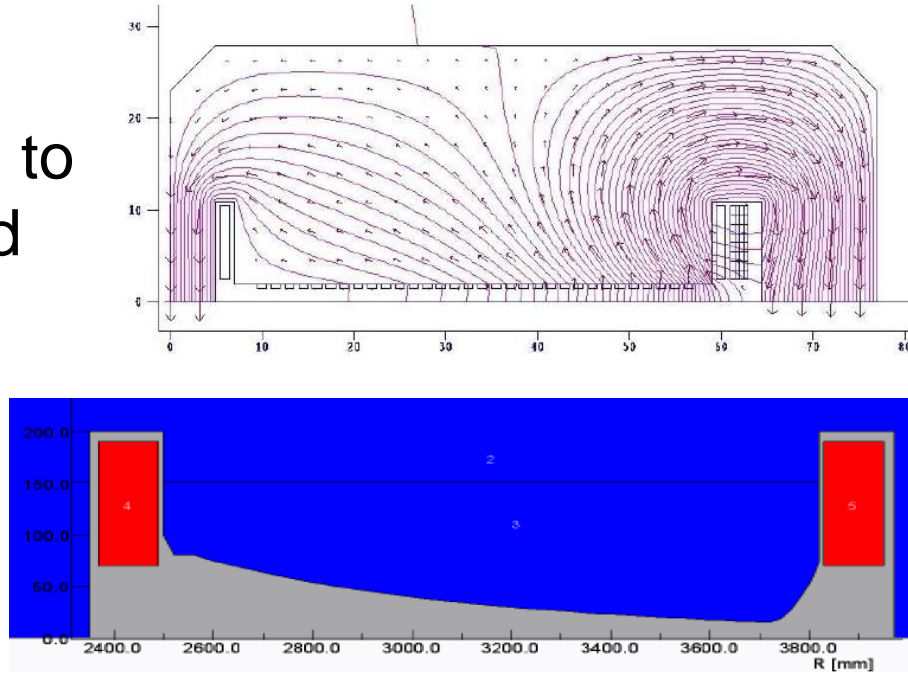

Magnet with distributed conductors:

- Parallel gap – vertical tune more stable,
- Flexible field and k adjustment,

„Gap shaping” magnet:


- Developed by SIGMAPHI for RACCAM project
- Initially thought as more difficult
- Behaves very well
- Chosen for the RACCAM prototype construction

- For LhARA magnet with parallel gap with distributed windings (but a single current) would be of choice with gap controlled by clamp. Concepts like an active clamp could be of interest too.
- Another important aspect of the R&D is the technology transfer for Magnetic Alloy (MA) loaded RF cavities for the ring





# Layout of the full LhARA facility

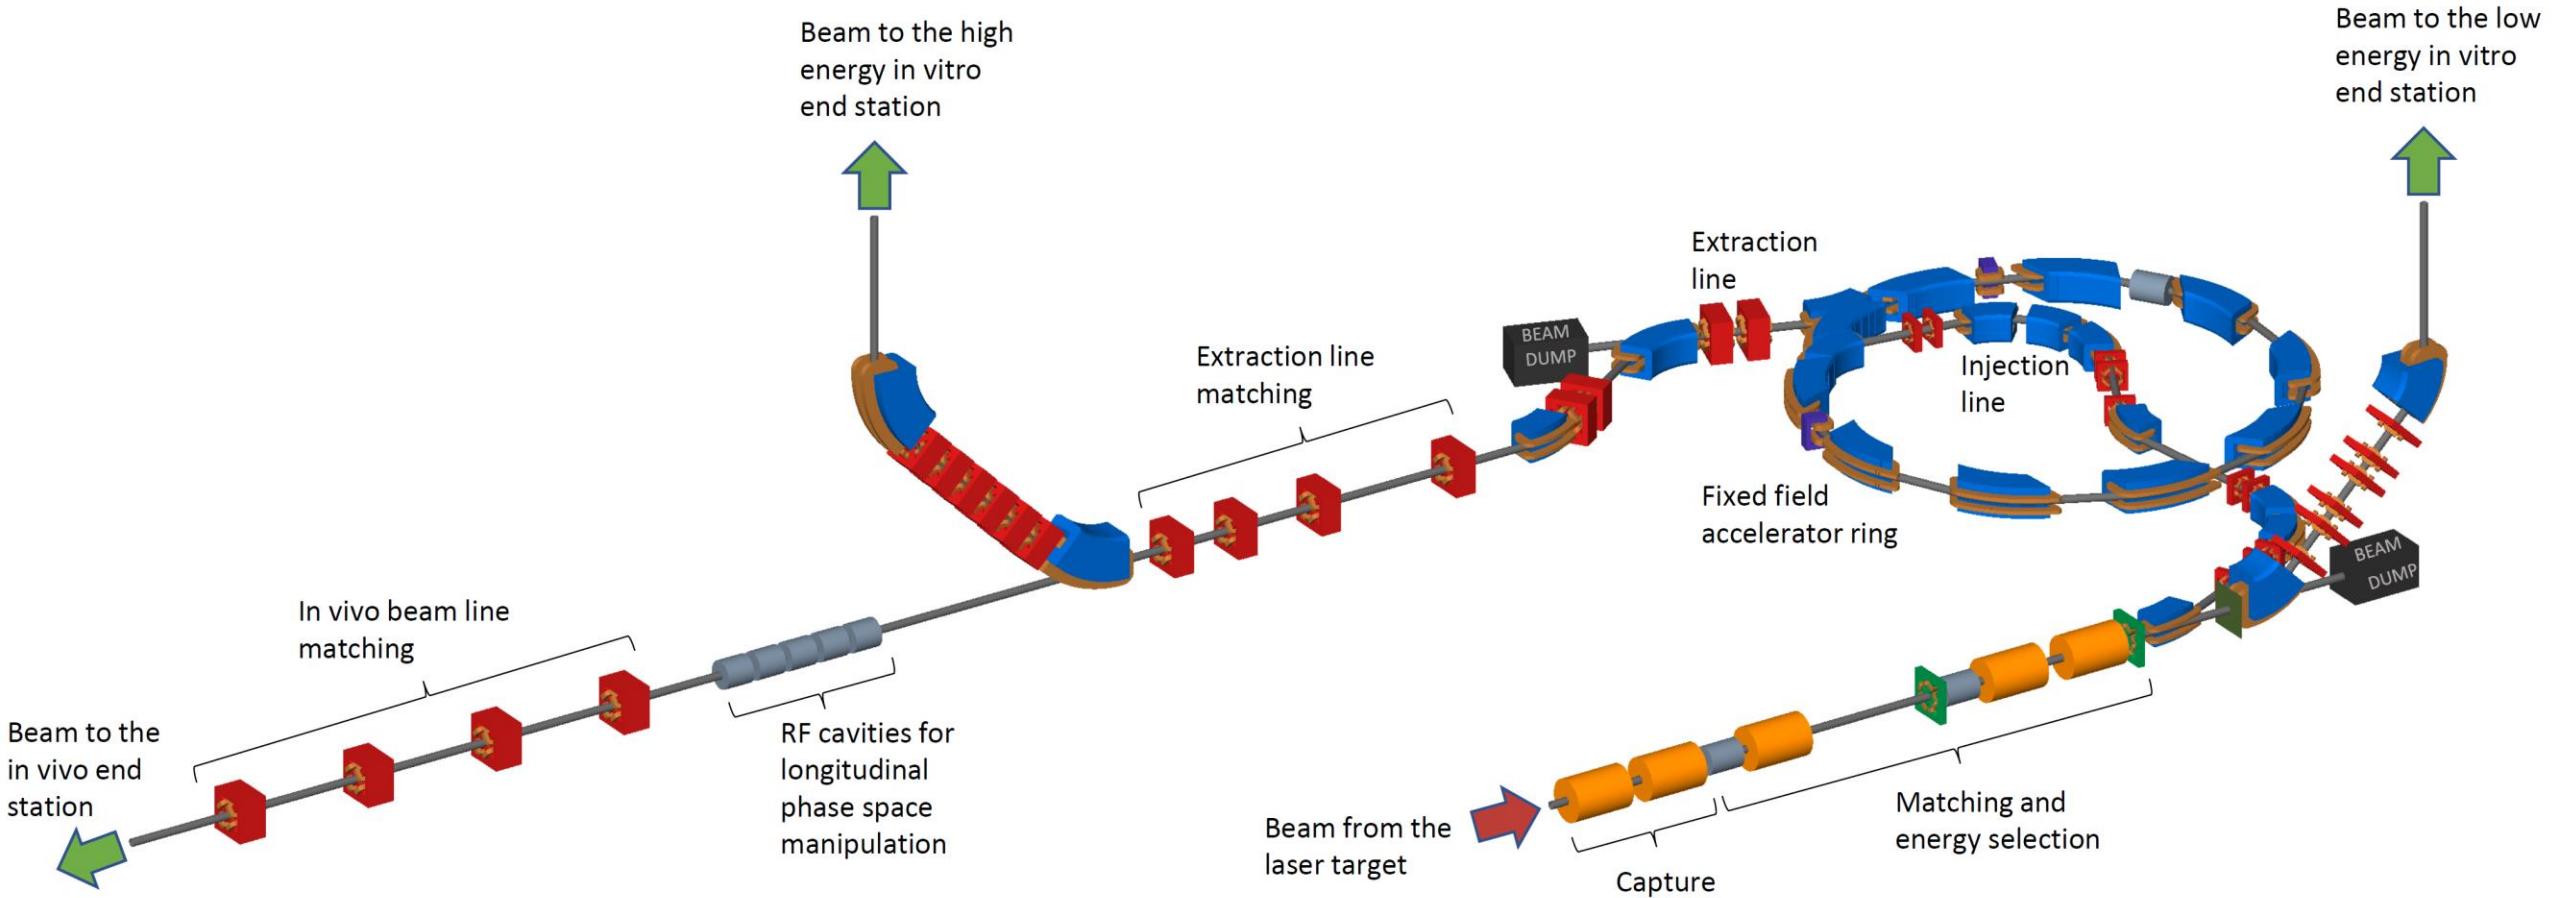

# Conclusions

- Conceptual design of LhARA is in a very good shape:
  - Stage 1 design is compact and flexible, and performs very well even including the space charge effects (see W. Shields' talk).
  - LhARA at Stage 2 can use FFA-type ring as a post-accelerator enabling variable energy beams of various types of ions. The cost effective, spiral scaling FFA shows a good performance in tracking studies.
  - Feasible ring injection, extraction and beam transport to the end stations at Stage 2 have been designed.
- Essential R&D items:
  - the main FFA magnet, and
  - the RF system for the ring